

## Firefighter Safety Switch

CRS005008P0 - 4 strings – IP66



### Electrical data (according to IEC 60947-3/UL508i)

#### Thermal current I<sub>th</sub> (-20°C - +50°C)

up to 40°C	38A
-20°C - +50°C	32A

#### String Voltage

800Vdc	DC-PV1	38A
1000 Vdc	DC-PV1	38A
1500 Vdc	DC-PV1	32A

#### Mechanical data

Minimum number of operations without load (cycles)	10000
Number on-load operations (cycles)	1500

\*Working voltage at 100-270Vac

Rated voltage 230Vac

Maximum temperature before automatic shutdown 70°C

### Standards

IEC 60947-3



### Quality Telergon, SAU



ISO 9001 &amp; 14001



### Codes

Case size	Poles	Strings	Reference
1	8P	4 strings	CRS005008P0

### Dimensions

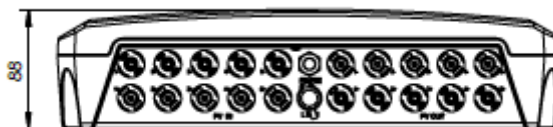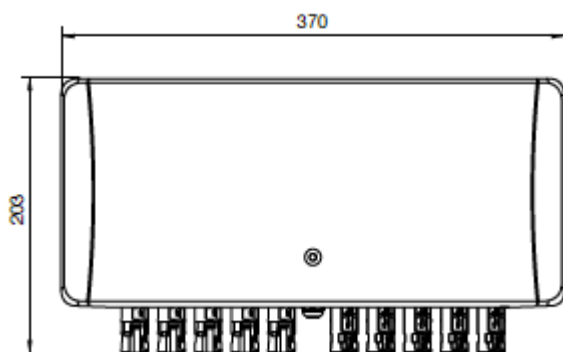

You will find detailed information about our products on our web site [www.telergon.com](http://www.telergon.com)



**Firefighter Safety Switch**  
CRS005008P0

TELERGON, SAU  
Data subject to change without  
notice (printed: 22/05/2024)