

Firefighter Safety Switch

CRS005010P0 - 5 strings – IP66

Electrical data (according to IEC 60947-3/UL508i)



Thermal current I_{th} (-20°C - +50°C)

up to 40°C	38A
-20°C - +50°C	32A

String Voltage

800Vdc	DC-PV1	38A
1000 Vdc	DC-PV1	38A
1500 Vdc	DC-PV1	32A

Mechanical data

Minimum number of operations without load (cycles)	10000
Number on-load operations (cycles)	1500

*Working voltage at 100-270Vac
 Rated voltage 230Vac
 Maximum temperature before automatic shutdown 70°C

Standards

IEC 60947-3



Quality Telergon, SAU



ISO 9001 & 14001



Codes

Case size	Poles	Strings	Reference
1	10P	5 strings	CRS005010P0

Dimensions

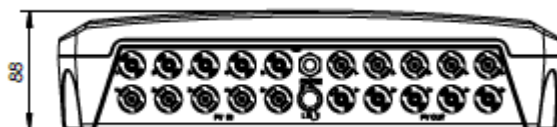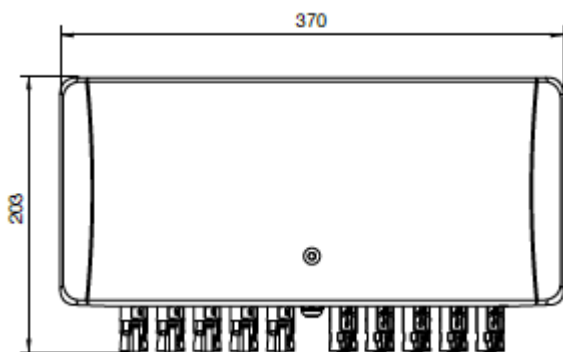

You will find detailed information about our products on our web site www.telergon.com



Firefighter Safety Switch
 CRS005010P0

TELERGON, SAU
 Data subject to change without notice (printed: 22/05/2024)